



D-CR4V950

Cromoterapia

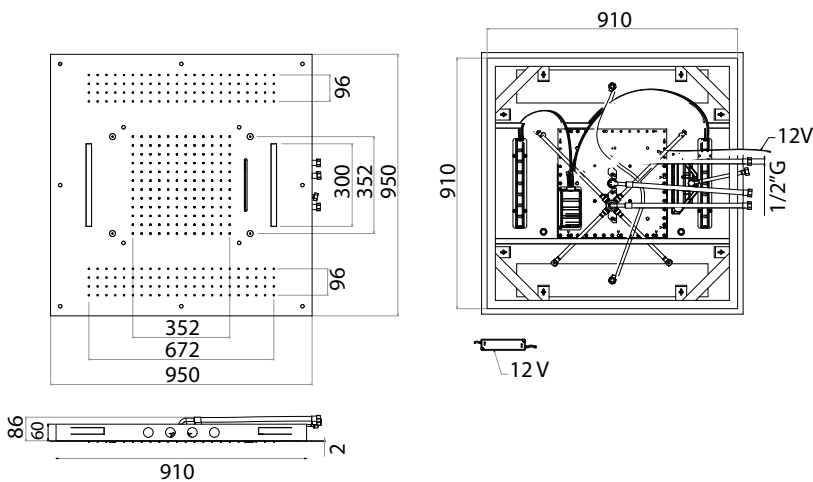

CARACTERÍSTICAS MANDO CONTROL A DISTANCIA

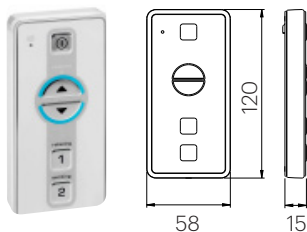

Dimensiones:
120x58x15 mm.

Aislamiento:
IP67.

Baterías:
2 baterías AAA de 1,5V.


DESCRIPCIÓN

Rociador cuadrado para cromoterapia de 950x950 mm enrasado a techo. Con sistema de 4 vías: lluvia central, lluvia lateral, cascada y pulverizador.

Incluye mando de control a distancia y luz directa.

Fabricado acero inoxidable AISI 304 o 316.

CAUDALES

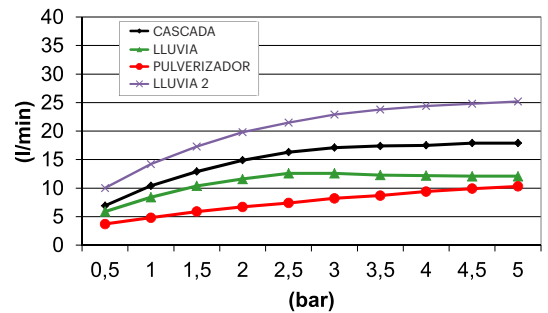

DISPONIBLES REDUCTORES DE CAUDAL

BREEAM®

9 l/m - C069019

6,6 l/m - C069060

AG 1 CONSUMO DE AGUA - REDUCTORES DE CAUDAL Y AIREADORES.
Nota técnica NT17.

ACABADOS DISPONIBLES

Acero inoxidable AISI 304



Negro
mate



Blanco
mate



Acero inox.
brillante




Oro
brillante



Acero inox.
cepillado

Acero inoxidable AISI 316



Gunmetal



Cobre
cepillado



Oro
cepillado

D-CR4V950

Chromotherapy




DESCRIPTION

950x950 mm ceiling-mounted square chromotherapy rainshower. 4-way system: central rain, side rain, waterfall and spray.

Includes remote control and direct light.

Made of stainless steel AISI 304 or 316.

FLOW RATE

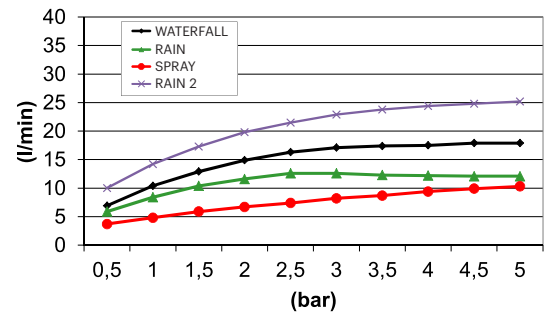

FLOW REDUCERS AVAILABLE

BREEAM®

9 l/m - C069019

6,6 l/m - C069060

AG 1 WATER CONSUMPTION - REDUCERS FLOW AND AERATORS.
Tech Note NT17.

AVAILABLE FINISHES

Stainless steel AISI 304



Matt black



Matt white



Polished stainless steel




Polished gold



Brushed stainless steel

Stainless steel AISI 316




Gunmetal




Brushed copper



Brushed gold

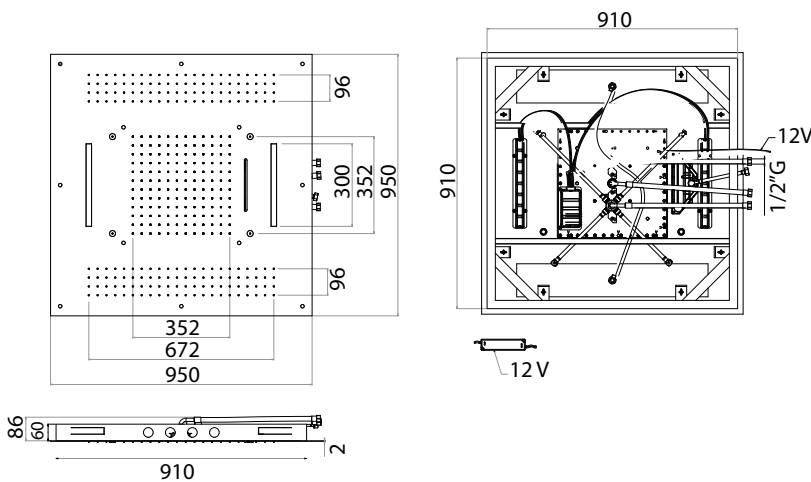

REMOTE CONTROL SPECIFICATIONS

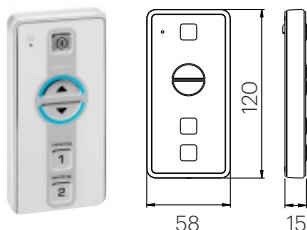

Dimensions:
120x58x15 mm.

Isolation:
IP67.

Batteries:
2 AAA de 1,5V batteries.

D-CR4V950

Chromothérapie




DESCRIPTION

Pomme de douche rectangulaire pour chromothérapie de 950x950 mm au ras du plafond. Avec système 4 voies: pluie centrale, pluie latérale, cascade et pulvériser.

Comprend une télécommande et lumière direct.

Fabriqué en acier inoxydable AISI 304 ou 316.

DÉBITS

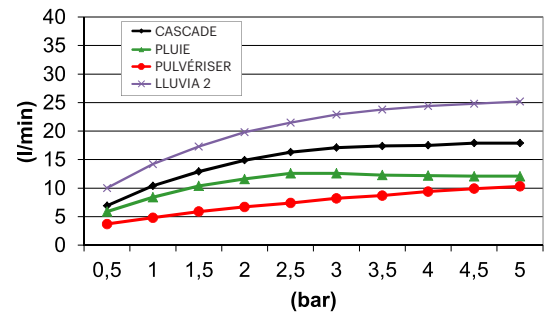

RÉDUCTEURS DE DÉBIT DISPONIBLES

BREEAM®


9 l/m - C069019

6,6 l/m - C069060


AG | CONSOMMATION D'EAU - RÉDUCTEUR DE DÉBIT ET AÉRATEURS.
Note technique NT17.

FINITIONS DISPONIBLES


Acier inoxydable AISI 304

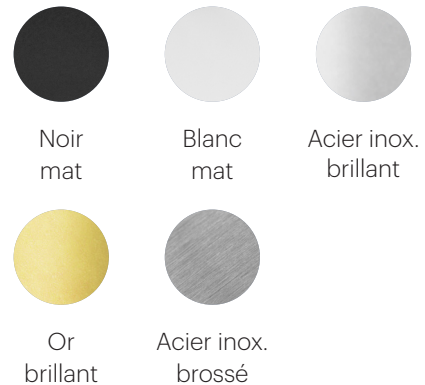

Acier inoxydable AISI 316

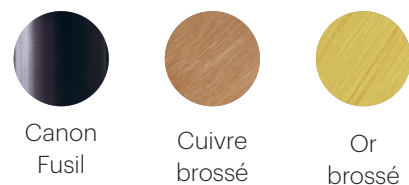

CARACTÉRISTIQUES TÉLÉCOMMANDE

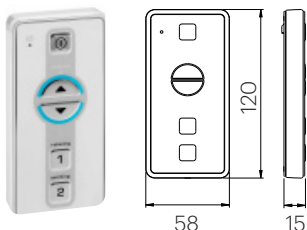

Dimensions:
120x58x15 mm.

Isolement:
IP67.

Batteries:
2 baterias AAA de 1,5V.