# smart toilet WC3







## SMART TOILET WC3

The WC3 wall hung toilet features the most advanced technology for hygiene care and personal cleanliness. With a U-shaped design with fine and sophisticated lines, its concealed cistern integrated into the wall makes it the perfect solution for those looking for a highly aesthetic finish.

### MAIN FUNCTIONS:

-Rear cleaning, frontal cleaning with massage -Water pressure and temperature adjustment

- -Heating seat
- —Air drying
- Nozzle position adjustment
  Antibacterial spray nozzle and seat
- Diatom deodorization
- Lid and seat with soft progressive closing
   Programmable memory controller
- Soft night light
- ECO mode for energy saving

## SMART TOILET WC3 FUNCTIONAL AND COMPACT DESIGN

Seat design of 69 mm.



## ERGONOMIC SEAT

Seat temperature adjustable up to 6 positions. From ambient temperature up to 40°.



## HEATING SEAT

Seat temperature adjustable up to 6 positions From ambient temperature up to 40°.




## ANTIBACTERIAL NOZZLE

Hygienic and antibacterial spraying nozzle. With an arc shaped design adjustable in 3 different positions for a front and rear cleaning.





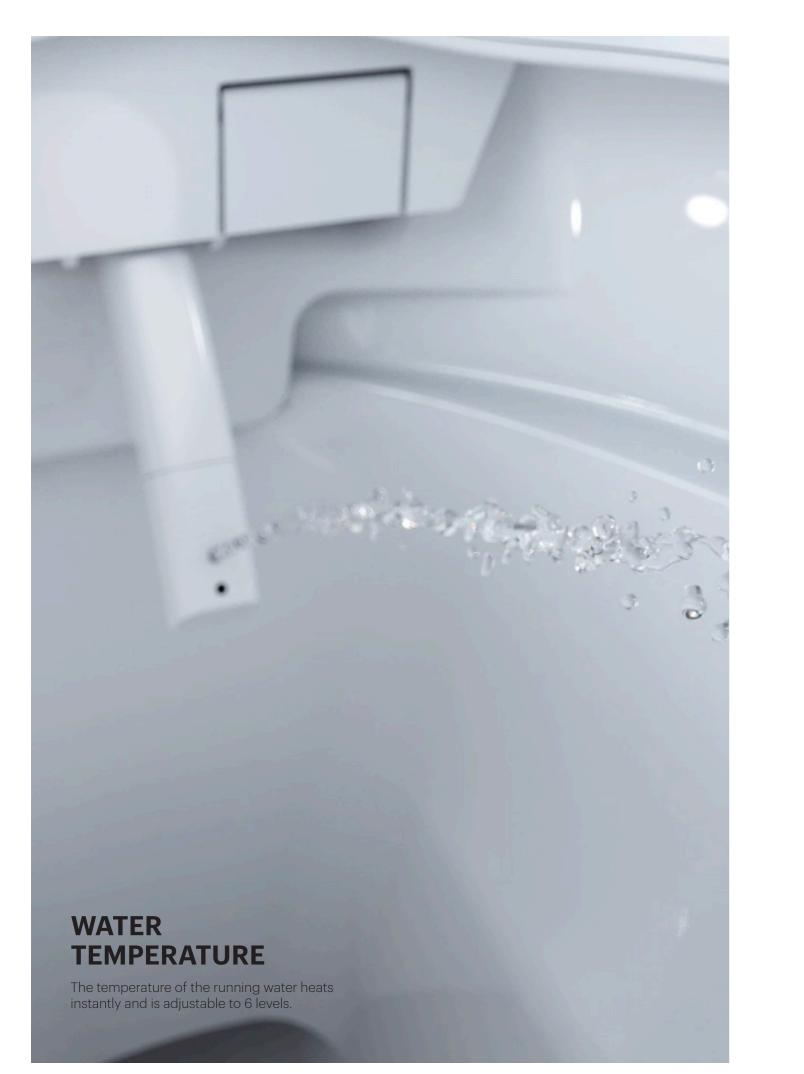





## LATERAL BUTTONS

Side buttons for easy use and convenient access to start the main functions.

## DRYING TEMPERATURE

Drying with cold or hot air adjustable to 6 levels of temperature.



## **NIGHT LIGHT**

WC3 has a soft and relaxing night light.



## **CLEANING AND HYGIENE**

The air partition design at the water inlet effectively prevents backflow of debris, in accordance with EN1717 water standards.

## **REMOTE CONTROL FUNCTIONS**

## កុំ ភ្លំ

### WASH Back washing and front washing through pressurized water.

### AIR TEMPERATURE

Regulation of drying air temperature adjustable up to 6 levels. (Room temperature up to 40°).

### **NIGHT LIGHT**

Configurable to be kept on all night or on specific moments.

### +

### WATER PRESSURE AND TEMPERATURE CONTROL

Regulation of water pressure and temperature.

## N

## FRONT WASH AND MASSAGE BACKWASH AND MASSAGE Front wash and massage function in

WATER TEMPERATURE

adjustable up to 6 levels.

(Network temperature up

to 40°).

LOW FLUSH

of 4L.

 $\wedge$ 

 $\sim$ 

Flush volume of the tank

Regulation of water temperature

a 90-second cycle.

## 

•...••

### SEAT TEMPERATURE

Seat temperature regulation adjustable in 6 levels. (Room temperature up to 40°).

a 90-second cycle.

Back wash and massage function in



## FULL FLUSH

Flush volume of the tank of 6L.

### NOZZLE ADJUSTMENT CONTROL

Regulation of the spray nozzle position in 3 positions.

## STOP - ECO MODE

Possibility to stop the functions at any time during the cycle. Start of energy saving mode by pressing 3 seconds.


# +


о Ш

R


PRESSURE



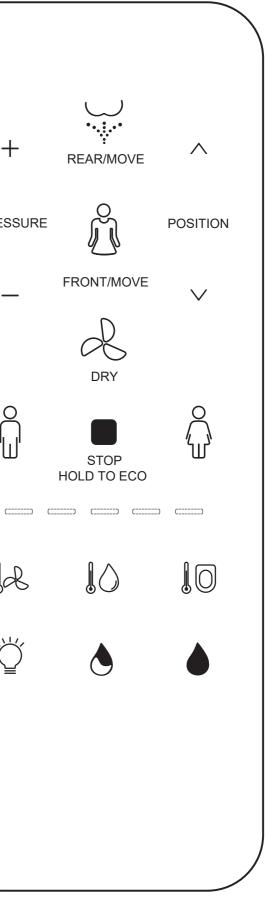

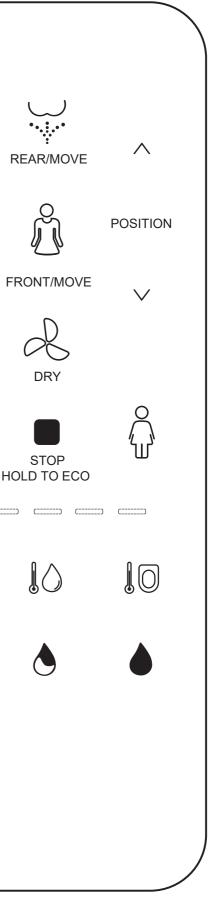



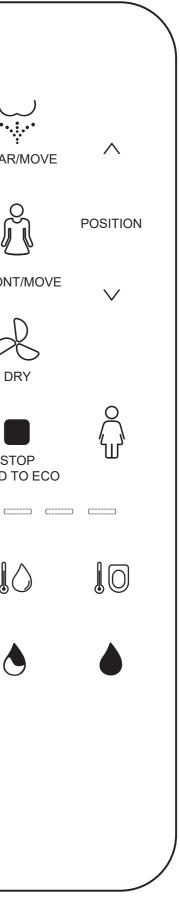

## SMART TOILET WC3 **SPECIFICATIONS**

DIMENSIONS 606x398x649mm\*

NET WEIGHT 39kg

EXIT SYSTEM Adaptable to drain 110mm

RATED VOLTAGEL 220-240V, 50/60Hz

RATED POWER 1080W-1130W

WATERPROOF LEVEL IPX4

CLEANING WATER FLOW 0,5-0,7L/min

DISCHARGE VOLUME Full discharge 6L / Reduced discharge 4L

APPLICABLE WATER PRESSURE 0,8 a 8bar

WATER TEMPERATURE ADJUSTMENT Temperatura de red hasta 40º

SEAT TEMPERATURE ADJUSTMENT Ambient temperature up to 40°C

AIR TEMPERATURE ADJUSTMENT Ambient temperature up to 40°C

NOZZLE POSITION ADJUSTMENT 3 positions


WASH WATER PRESSURE 3 levels


SAFETY DEVICES Thermal fuse, water temperature sensor, thermostat. Over temperature protection, current leakage protection.

DEODORIZATION By diatoms

CONTROL Manual and through remote control

## GENERAL **DIMENSIONS**

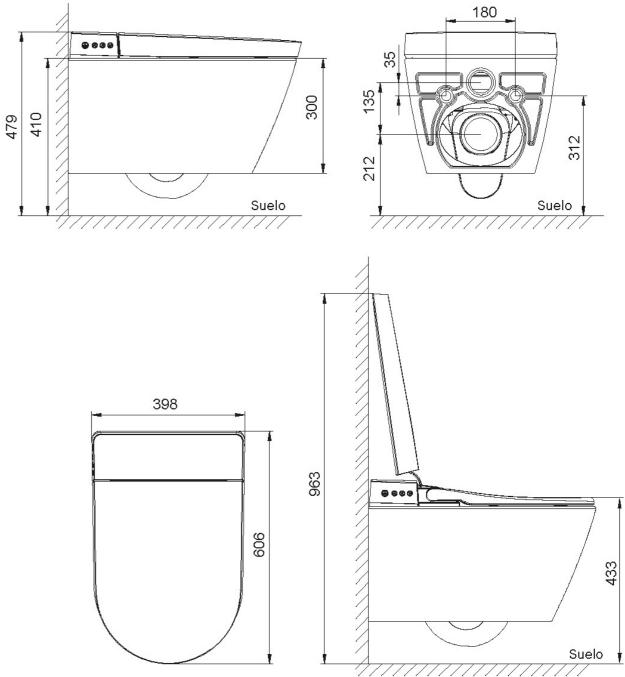






## INSTALLATION CONCEALED CISTERN



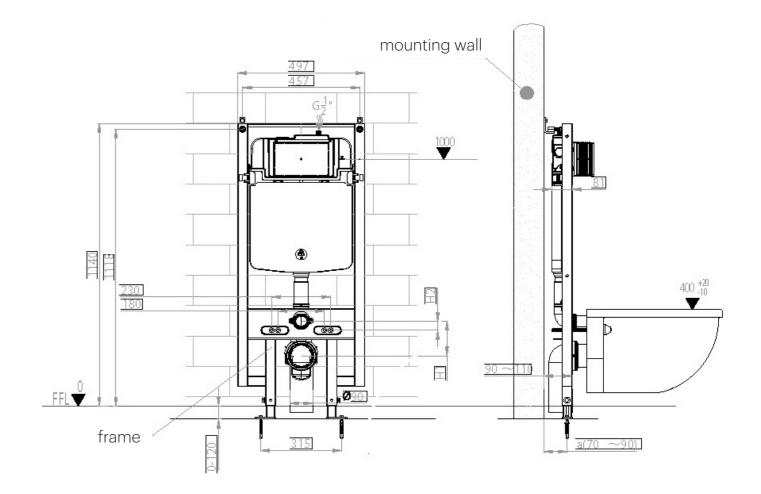

# CONCEALED CISTERN CHARACTERISTICS

 Built-in cistern independently developed by injection and watertight.

— Metal frame made of anti-corrosion and anti-rust material, which can last for a long time.

— Adjustable leg support, high or low, as you wish.

- Water and electrical circuit protection tube for long-term safe use.





www.iconico.es